

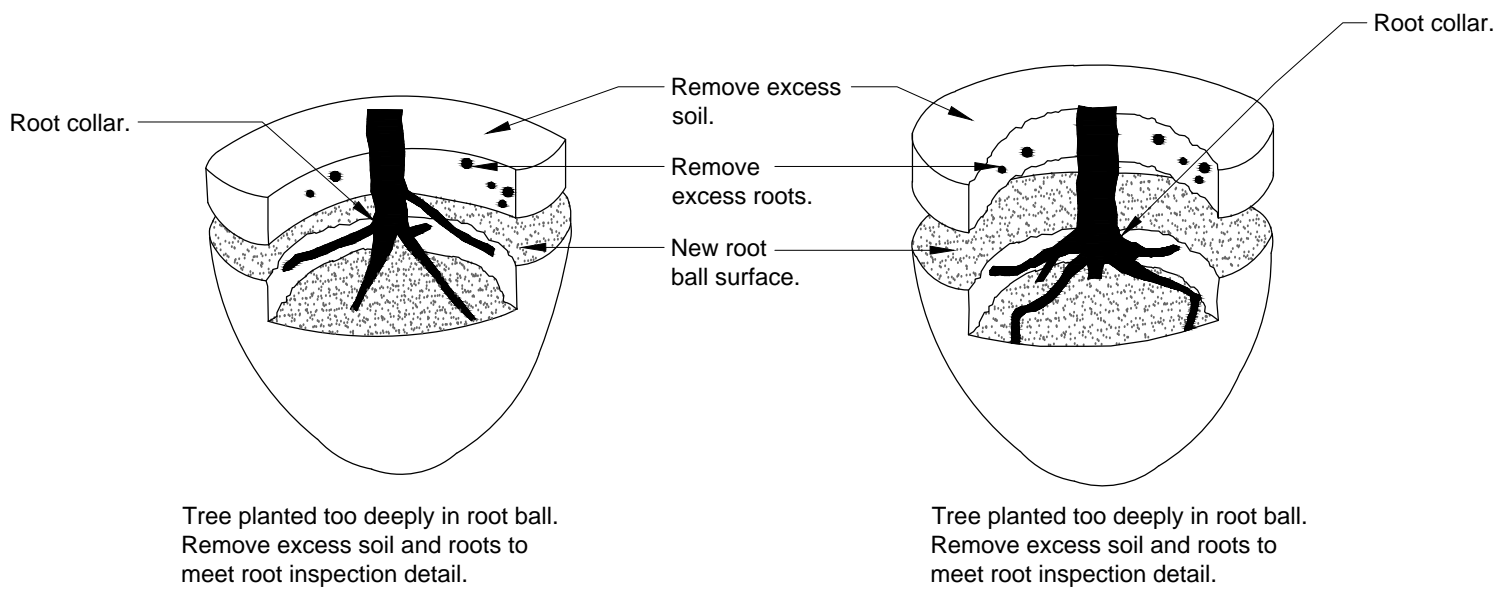
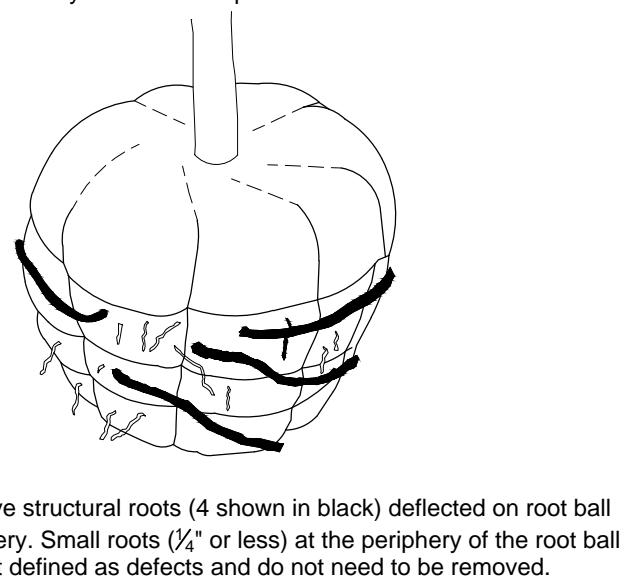
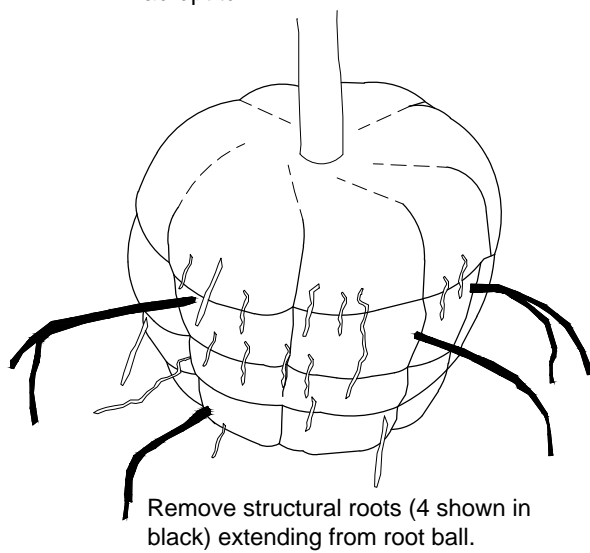


Step 1 - Remove soil and roots over the root collar.

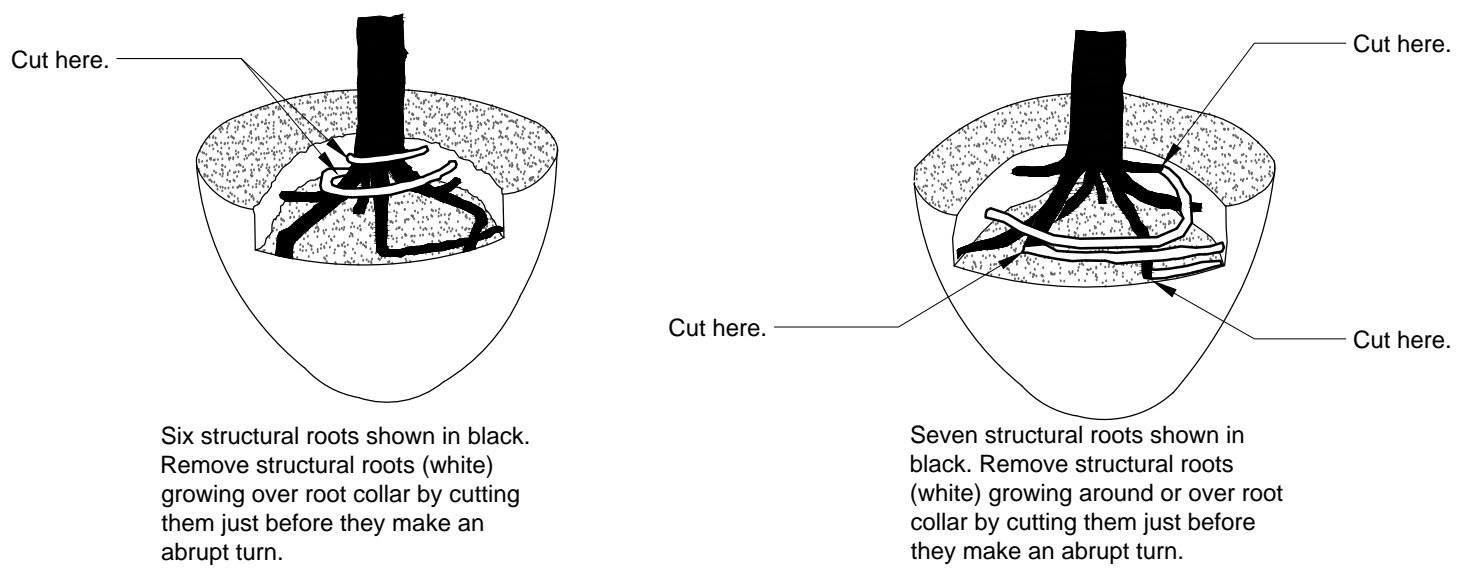

Step 2 - Remove defects.

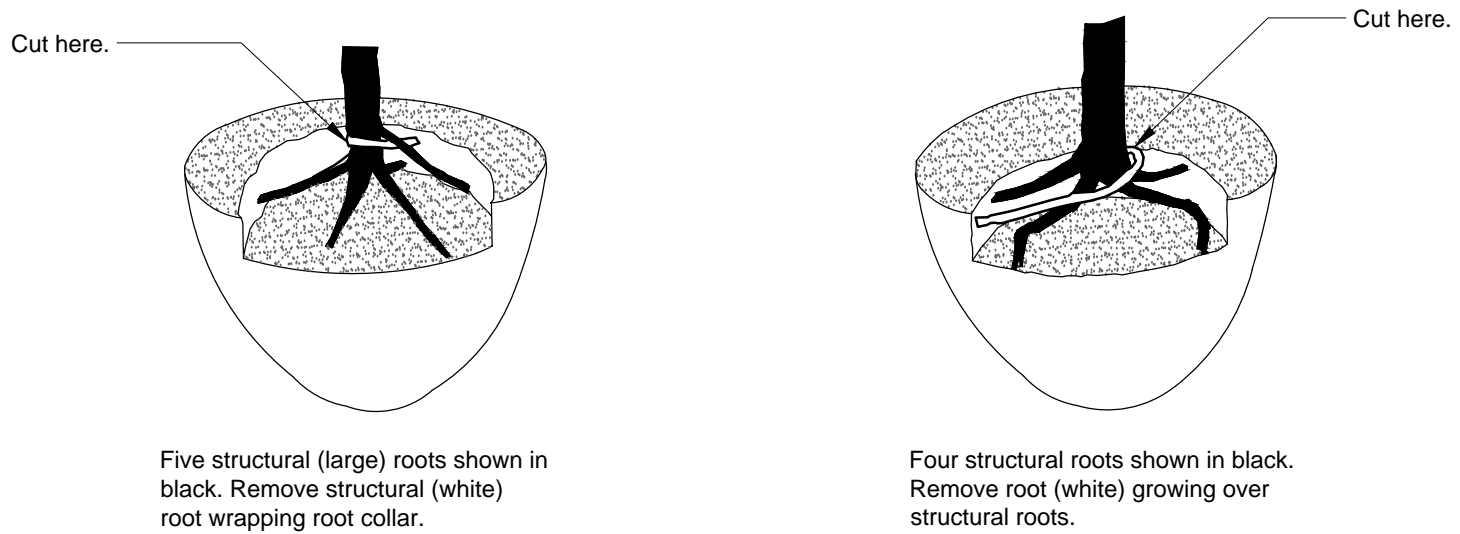

Notes:

- 1- All trees shown are rejectable unless they undergo recommended correction.
- 2- First step 1, then step 2. Adjust hole depth to allow for the removal of excess soil and roots over the root collar.
- 3- Roots and soil may be removed during the correction process; substrate/soil shall be replaced after the correction has been completed.
- 4- Trees shall pass root observations detail following correction.