


**SECTION VIEW**

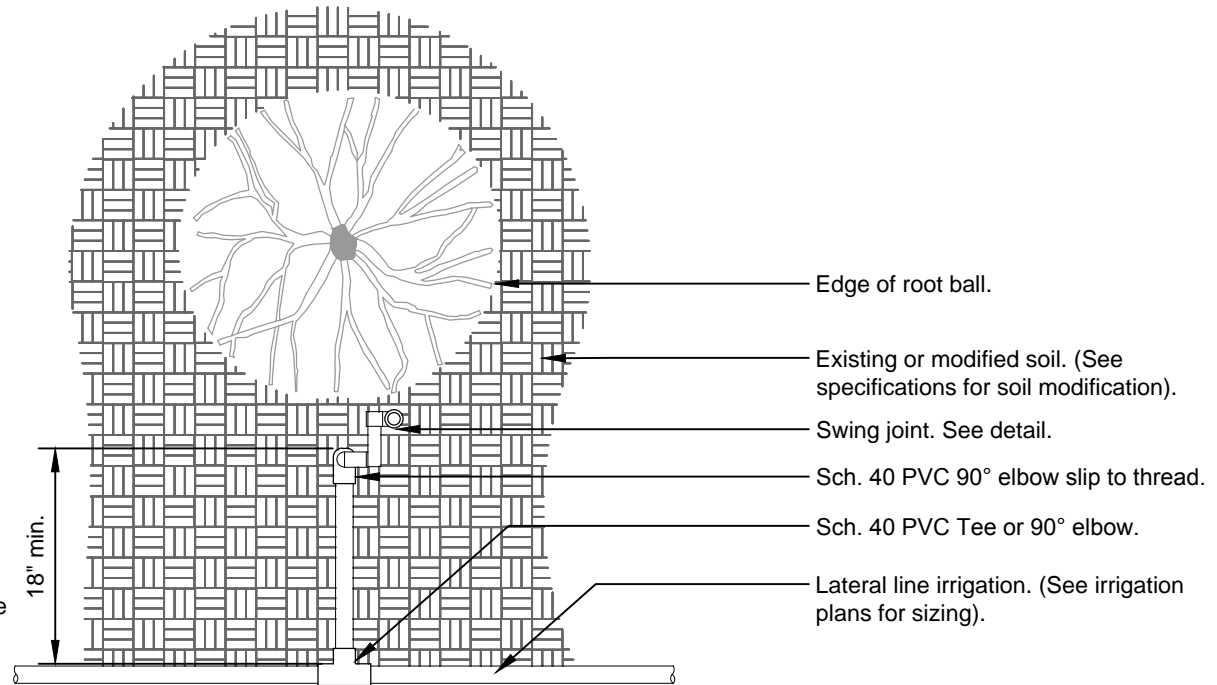

**PLAN VIEW**

**Notes:**

1- All irrigation fittings shall be Sch. 40 PVC unless specified otherwise.

2- All threaded connections from Sch. 40 to Sch. 80 PVC shall be made using teflon tape.

3- Contractor shall settle the area around the bubbler and edge of the root ball so that all irrigation flows through the root ball.



# IRRIGATION BUBBLER W/ LAYOUT